


Safety Hook– Ball Joint Type

SAFETY HOOK

JCP Models

Description

J-1-5101	Ball Joint Safety Hook (shown)
J-1-5102	Ball Joint Safety Hook w/ Embed
J-1-5103	Ball Joint Safety Hook w/ Stainless Steel Embed
J-1-5104	Ball Joint (2) Safety Hook w/ Back Plate
J-1-5105	Ball Joint (2) Safety Hook w/ Embed
J-1-5106	Ball Joint (2) Safety Hook w/ Stainless Steel Back Plate
J-1-5107	Ball Joint (2) Safety Hook w/ Stainless Steel Embed
J-1-5108	Ball Joint (4) Safety Hook w/ Back Plate
J-1-5109	Ball Joint (4) Safety Hook w/ Embed
J-1-5110	Ball Joint (4) Safety Hook w/ Stainless Steel Back Plate (shown)
J-1-5111	Ball Joint (4) Safety Hook w/ Stainless Steel Embed

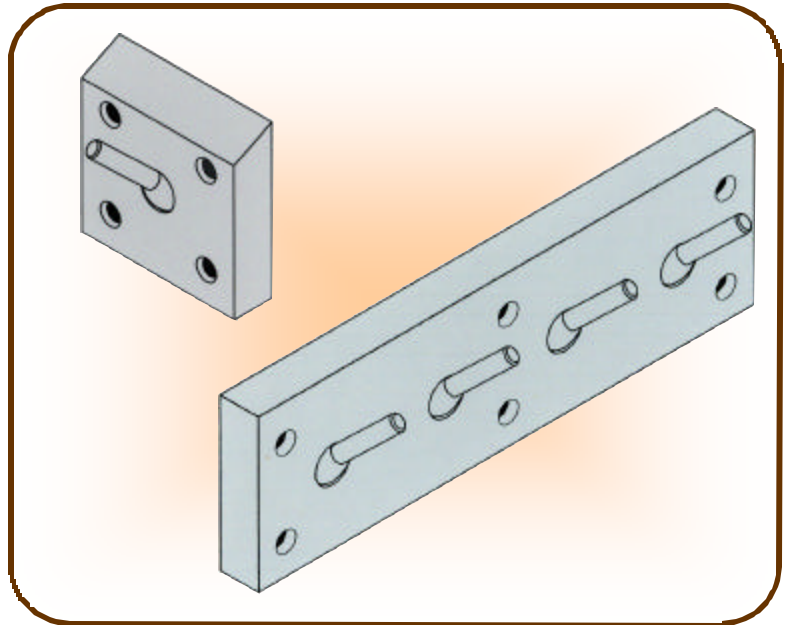

JCP Specifications: Ball joint type safety hook body is fabricated from 14 gauge stainless steel and is 4” wide x 4” long x 1” deep. The 3/8” diameter x 1-1/4” long stainless steel hook is connected to a ball joint that moves in a nylon insert. The ball joint type safety hook is designed to collapse at approximately 40 pounds or less of pressure and can not adjusted. The ball joint type safety hook is designed to be mounted to other products such as a shelf with the provided (4) 1/4-20 flat head Torx® w/ pin screws.

The back plate of the embed for the ball joint safety hook is fabricated from 7 gauge HRPO steel and is 5” x 5”. The anchor strap is fabricated from 12 gauge HRPO steel and is 2” wide and 4” long. The embed assembly will receive one shop coat of our standard primer.

The back plate of the stainless steel embed for the ball joint safety hook is fabricated from 7 gauge stainless steel and is 5” x 5”. The anchor strap is fabricated from 12 gauge stainless steel and is 2” wide and 4” long. All stainless steel will have a random orbital finish.

The back plate for the ball joint (2) safety hook is fabricated from 7 gauge HRPO steel and is 5” x 10” and will have four 1/2” diameter holes for the installation to the wall with security anchors provided by the installer. The embed assembly will receive one shop coat of our standard primer.

The stainless steel back plate for the ball joint (2) safety hook is fabricated from 7 gauge stainless steel and is 5” x 10” and will have four 1/2” diameter holes for the installation to the wall with security anchors provided by the installer. All stainless steel will have a random orbital finish.

The ball joint type (2) safety hooks with back plate or embed are similar to the above specification other than they will have 5” x 10” plates to accommodate the two safety hooks

The ball joint type (4) safety hooks with back plate or embed are similar to the above specification other than they will have 5” x 20” plates to accommodate the four safety hooks

The installer of the embeds will place the embed on the appropriate block course and lay the block in and around the embed straps. The installer will insert a #4 rebar (provided by installer) through each anchor strap and verify that the embed is flat and true. The block wall must be grouted solid for proper anchorage.

JAILS CORRECTIONAL PRODUCTS A Division of **FABCOR, Inc.**

350 South Ohio Street, P.O. Box 58
Minster, Ohio 45865
www.fabcor.com

Phone: (419) 628- 4428
Fax: (419) 628- 2899
E-mail: jails@fabcor.com

Equipment Assembly

EA-09.03

Revision C

©2003 Fabcor, Inc.